


HDCVI VANDAL DOME, 2 MP

HDCVI™

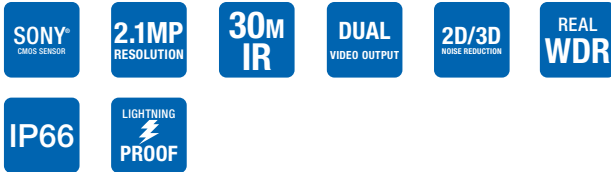

FEATURES

- Full HD resolution with Sony® CMOS sensor
- IR illumination up to 30 meters
- 2.8~8 mm varifocal lens, autofocus
- Transmission distance up to 300 (theoretical) meters
- AWB, AGC, BLC, HLC, real WDR 120dB, 2D/3D-DNR, defog
- Slow shutter, Smart IR, Sense Up, digital zoom
- Mirror, motion detection, privacy mask
- OSD menu (not compatible with ZVR NEXTGEN)
- Double video output connector (yellow connector = CVBS (analog) + green connector = HDCVI output)
- IP66
- Surge protection
- 3AXIS: wall and ceiling installation

ACCESSORIES



HYU-153
Deep base




HYU-28
Wall mount



HYU-29
Ceiling mount

DIMENSIONS

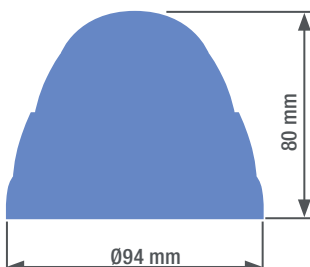

CAMERA

Image sensor	1/2.9" Sony® CMOS, 2.1 MP
Effective pixels	1984(H) x 1105(V)
Frames per second	PAL/NTSC: 25/30 fps @1080P
Electronic shutter	Auto, 1/25s ~ 1/50.000s, FLK, 1 ~ 30X
IR illumination	5 array led: 20 ~ 30 meters
Minimum illumination	0,017 lux F1,2 (AGC ON) / 0 lux IR ON
Video output	1 BNC HD-CVI, 1 BNC CVBS

LENS

Lens	2,8 ~ 8 mm
Focus mode	Automatic

FUNCTIONS

Day/night	Auto (ICR), Color, B/W, Ext
OSD menu	Supported
White balance	AWB, ATW, indoor, outdoor, manual
Gain control	AGC
Backlight compensation	BLC, HLC, real WDR 120dB
Noise reduction	2D/3D-DNR
Defog	Supported
Mirror	Supported
Motion detection	Supported
Privacy mask	Supported

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±10%) /700 mA
Consumption	>8W
Working temperature	-20°C ~ +60°C
RH	10% ~ 90% HR
Transmission distance	Up to 300 meters (theoretical) via 75-3 coaxial cable
Protection	IP66

PHYSICAL FEATURES

Dimensions	Ø94 x 80 mm
------------	-------------