


4 IN 1 BULLET CAMERA, 2 MP

CVBS HDCVI™

HDTVI AHD

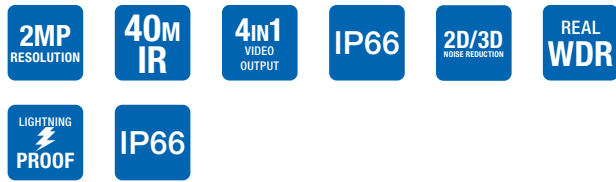

FEATURES

- Full HD resolution with Panasonic CMOS sensor
- IR illumination up to 40 meters
- 2.8 ~ 12 mm varifocal lens
- Transmission distance up to 300 (theoretical) meters
- AWB, AGC, BLC, HLC, real WDR 120dB, 2D/3D-DNR, defog
- Slow shutter, Smart IR, Sense Up
- Mirror, motion detection, privacy mask
- OSD menu
- 4 in 1 output (OSD switch): CVBS output + triple output: HDCVI, HDTVI, AHD
- IP66
- Surge protection
- 3AXIS bracket with cable passage

DOUBLE OUTPUT



ACCESSORIES



HYU-172
Deep base

CAMERA

Image sensor	1/3" Panasonic CMOS, 2.1 MP
Effective pixels	1944(H) x 1092(V)
Frames per second	PAL/NTSC: 25/30 fps @1080P, 50/60 fps @720P
Electronic shutter	Auto, 1/25s ~ 1/50.000s
IR illumination	15 array led: 30 ~ 40 meters
Minimum illumination	0,02 lux F1,2 (AGC ON) / 0 lux IR ON
Video output	AHD, HD-CVI, HD-TVI, 1 BNC CVBS (OSD switch)

LENS

Lens	2.8 ~ 12 mm
------	-------------

FUNCTIONS

Day/night	Auto, Color, B/W, Ext
OSD menu	Supported
White balance	AWB, ATW, indoor, outdoor, manual
Gain control	AGC
Backlight compensation	BLC, HLC, real WDR 120dB
Noise reduction	2D/3D-DNR
Defog	Supported
Mirror	Supported
Motion detection	Supported
Privacy mask	Supported

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±10%) /670 mA
Consumption	<8W
Working temperature	-20°C ~ +60°C
RH	10% ~ 90% HR
Transmission distance	Up to 300 meters (theoretical) via 75-3 coaxial cable
Protection	IP66

PHYSICAL FEATURES

Dimensions	262,3 x 75 x 73 mm
------------	--------------------